

Queen Mary School Hainan  
Queen Mary University of London

# QHP5701 Exploratory Data Analysis Systems

*Nikesh Bajaj, PhD*  
*Lecturer in Data Science,*  
*Queen Mary University of London*  
[nikesh.bajaj@qmul.ac.uk](mailto:nikesh.bajaj@qmul.ac.uk)  
<https://nikeshbajaj.in>

# Contents

---

- Continues-time Systems
- Discreet-time Systems
- Properties
- Convolution, Filtering

**#Ref: Chapter 1, Oppenheim**

**#Ref: Chapter 2, Oppenheim**

# QHP5701 Exploratory Data Analysis

---

## Systems

*Note: Most of slides will be empty for in-class computations*

Since we are following a text-book heavily, slides, will not include all the mathematical computations and details. Please check the text-book, for details.

**#Ref: Chapter 1, Oppenheim**

*Nikesh Bajaj, PhD*  
*Lecturer in Data Science,*  
*Queen Mary University of London*  
[nikesh.bajaj@qmul.ac.uk](mailto:nikesh.bajaj@qmul.ac.uk)  
<https://nikeshbajaj.in>

# Recall: Signals & Systems

---


- Signals and Systems?

*Any activity of human, can be thought of interaction or an interplay of the signals & systems*

- A system as a block:

- **is a meaningful** interconnection of physical devices or components
- is an interconnection of subsystems, which are composed of physical devices or components

- A system by itself cannot achieve anything, it must be closely related to signals

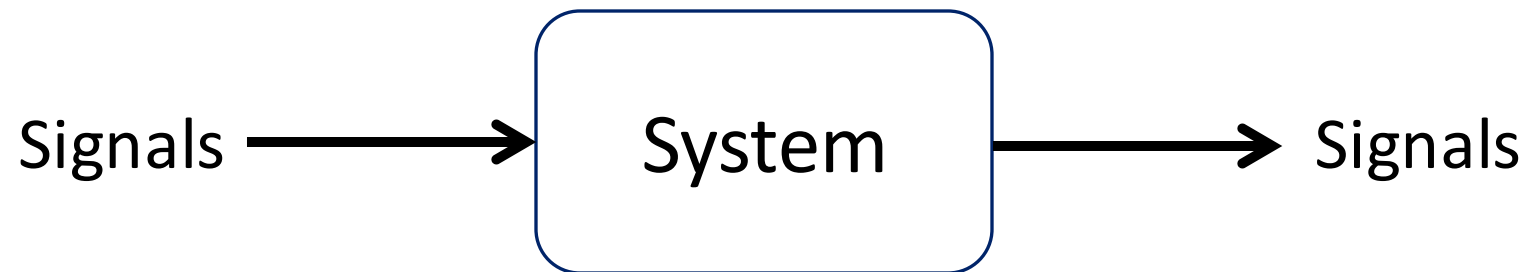


# Recall: Signals & Systems

---

- Signals and Systems?

*Any activity of human, can be thought of interaction or an interplay of the signals & systems*

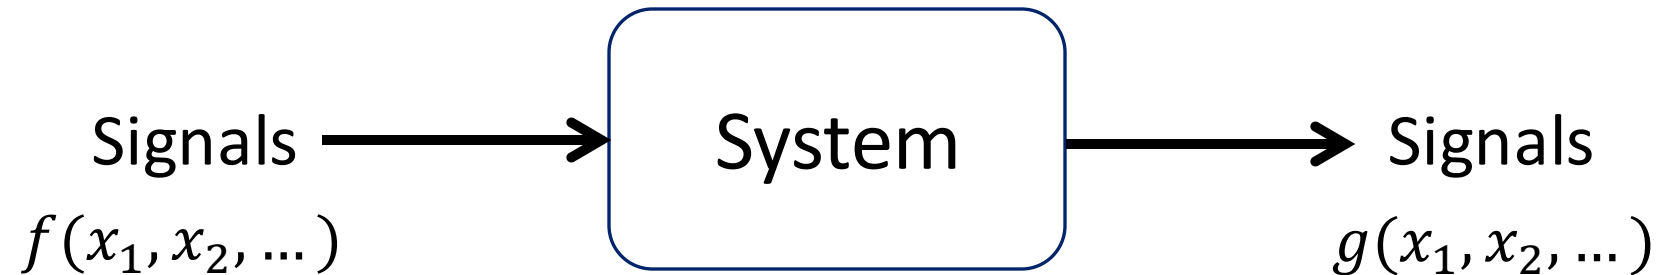

*A **signal**, in general, is a function of one or more independent variables*

*System takes a signal, e.g.  $x(t)$ , as input and produced more desirable output  $y(t)$*

*e.g. Signal processing blocks*






# Signals

A **signal**, in general, is a function of one or more independent variables


$$f(x_1, x_2, \dots), x(t)$$

## Examples

- Temperature in Hainan:  $x(t)$
- Speech/audio:  $x(t)$
- EEG, ECG,  $x(t)$
- Image  $I(x,y)$
- Video  $V(x,y,t)$

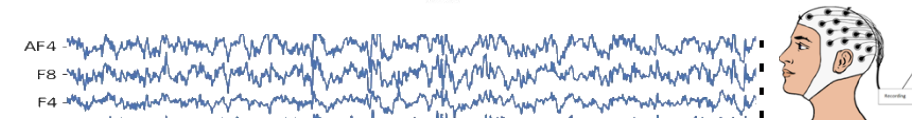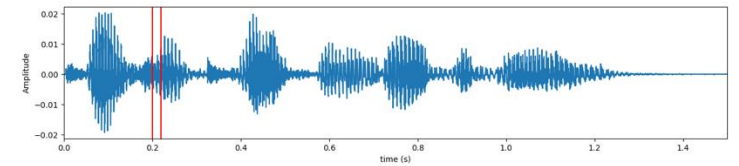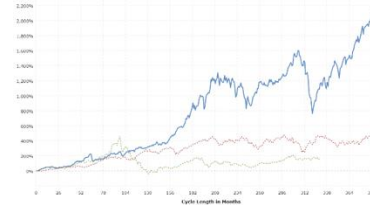

Magnetic Resonance Image (MRI) data as 2-dimensional signal



# Signals

---


A **signal**, in general, is a function of one or more independent variables

$$f(x_1, x_2, \dots), \quad x(t)$$

Anything that changes over one or more dimensions can be thought as a signal

# Examples of Signals & Systems

---

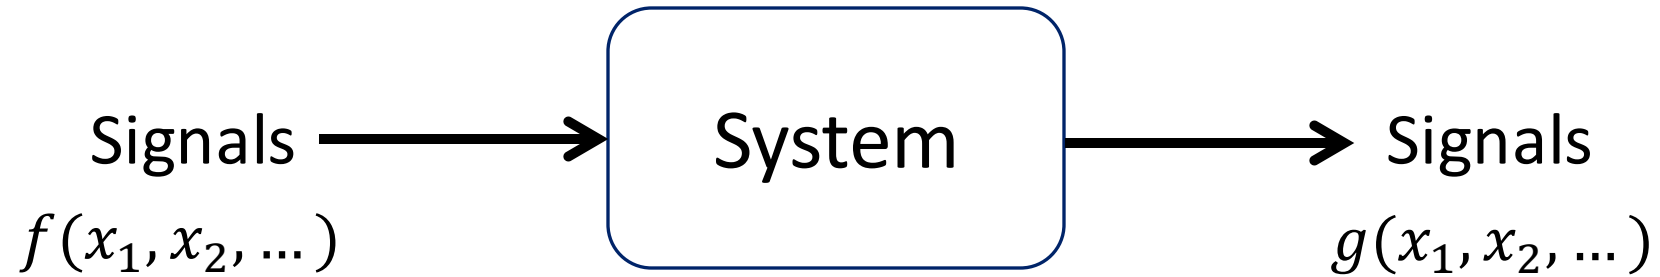


## Examples

- Electrical Circuit
- Motor
- Heart Monitor
- ...
- ...

# Signals & Systems: Problems

---

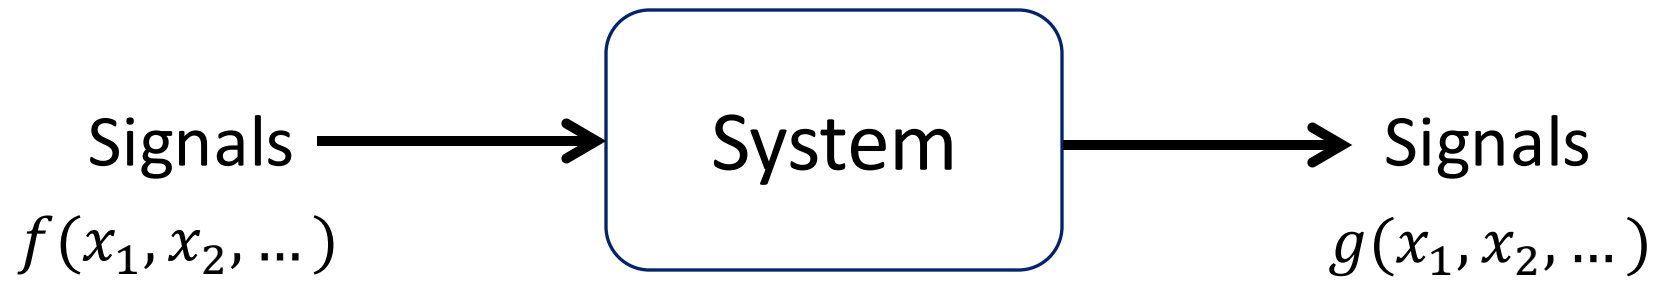

Analysis  
Problems



Design/Synthesis  
Problems



Analysis Problems: Given: Input signal and system    Find: output signal

Design/Synthesis Problems: Given: Input signal and desired output signal    Design: System

1. Input-output relationship
2. Block-diagram
3. Impulse response
4. Transfer function


# Types of system

---

*Continues-time System : CT System*


*Discreet-time System : DT System*

*Hybrid System (A/D and D/A Convertor)*

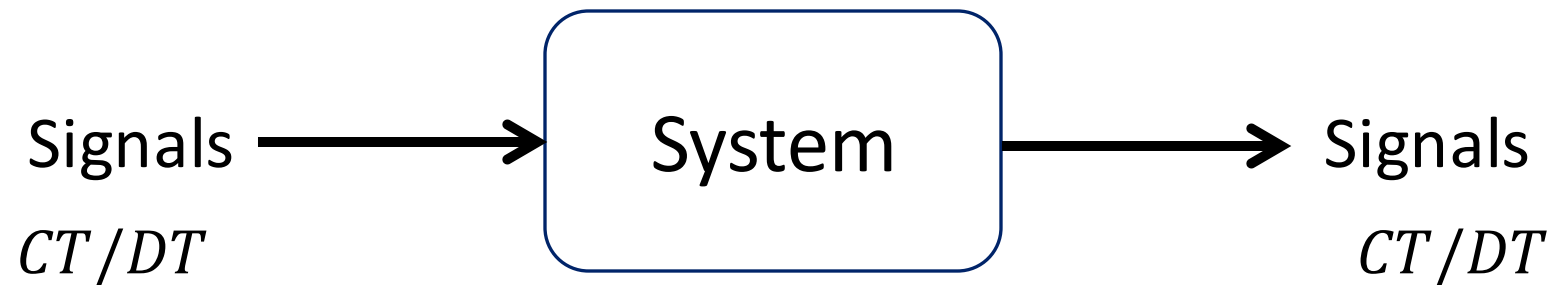

# Types of system

---

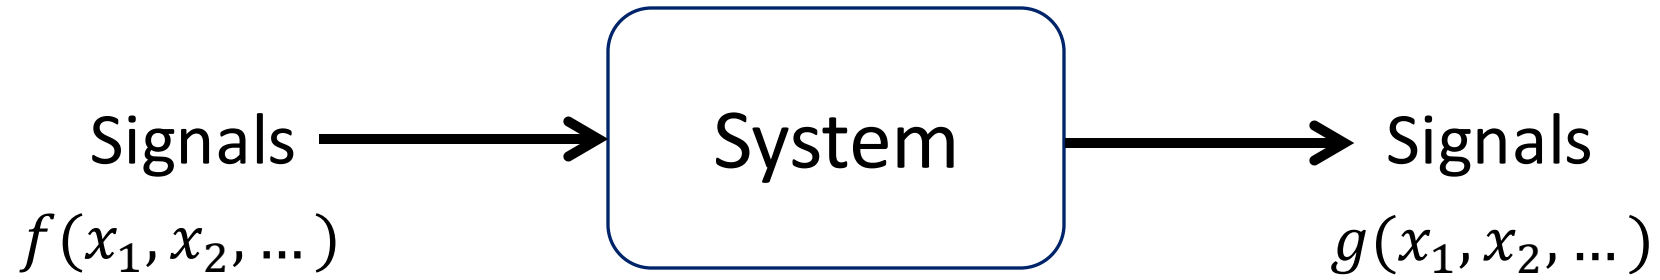


SISO – Single Input Single Output

MIMO- Multiple Input Multiple Output


# Connection of systems (subsystems)

---

Cascade/Series/Tandem  
Connection

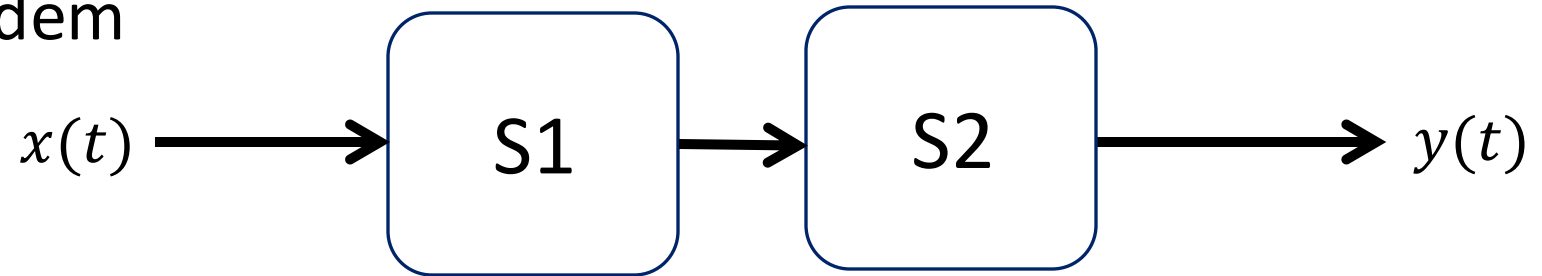


Parallel Connection

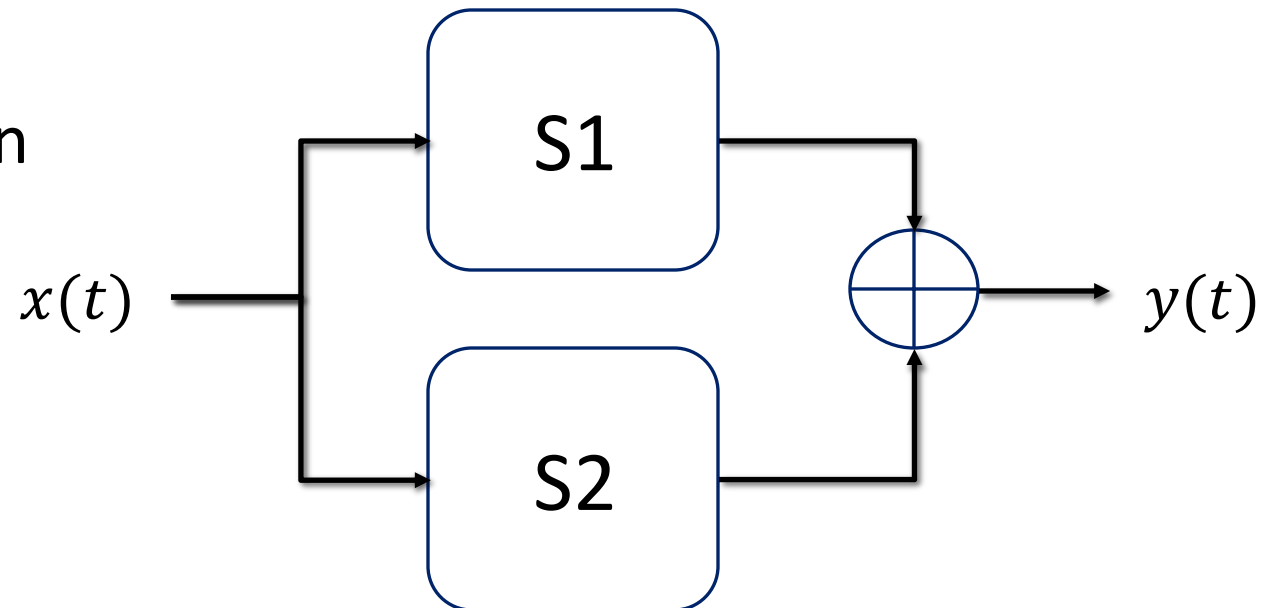

# Connection of systems (subsystems)

---

## Feedback Connection

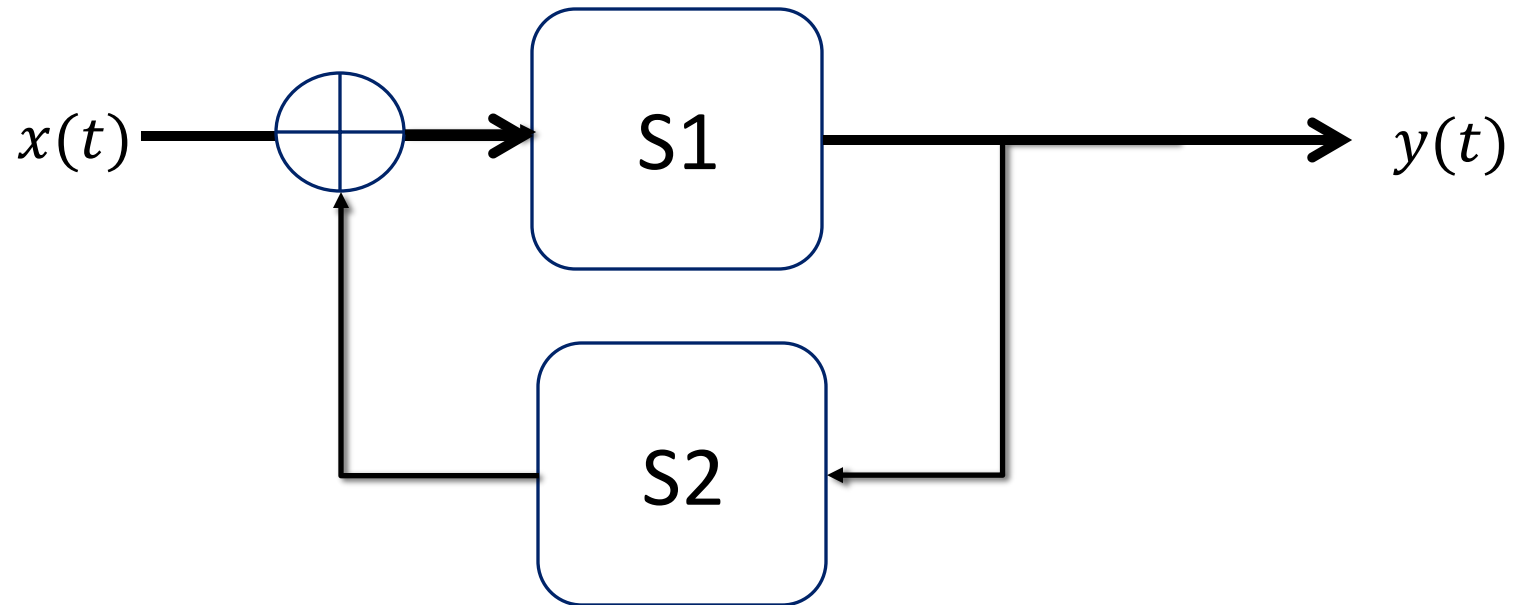

# Connection of systems (subsystems)

---

Hybrid: Mix

1. Input-output relationship
2. Block-diagram
3. Impulse response
4. Transfer function

# Defining a system

---

*System can be defined as a function  $f$  or a transformation*

System can be defined in several ways.

## **1. Input-output relationship**

$$y(t) = x(t) + 0.5x(t - 1)$$

$$y(n) = x(n) + x(n - 1)$$

$$y(n) = Ax(n)$$

$$y(t) = x(2t - 1)$$

$$x(t) \rightarrow y(t)$$

$$y(t) = T\{x(t)\}$$

$$y(t) = f(x(t))$$

# Defining a system

---

System can be defined in several ways.

## 2. Block-diagram

$$y(n) = x(n) + x(n - 1)$$

$$y(n) = Ax(n)$$

# Defining a system

---

System can be defined in several ways.

**3. Impulse response**

**4. Transfer function**

Will see in due course

# Properties of System

---

- With memory or Without Memory
- Linear or Nonlinear
- Time invariant or Time variant
- Stable or Unstable
- Causal or Non-causal
- Invertible or Non-invertible

**Linear and Time Invariant System**  
**LTI System**

# With memory or Without Memory

---

- Memory?
- Memoryless: Instantaneous
- With Memory: Dynamic System, initial conditions
  - - Capacitor, Inductor

$$y(t) = x(t) + x(t - 1)$$

$$y(t) = (x(t) + x^2(t))^{1/2}$$

$$y(t) = x(t^2)$$

# With memory or Without Memory

---

- Memory?

# Invertible or Non-invertible

---

Invertible  $x(t) \rightarrow y(t) \rightarrow x(t)$

$$x(t) \rightarrow y(t)$$

$$y(t) \rightarrow x(t)?$$

$$y(n) = \sum_{k=-\infty}^n x(k)$$

$$y(t) = 0$$

$$y(t) = x^2(t)$$

# Invertible or Non-invertible

---

Invertible       $x(t) \rightarrow y(t) \rightarrow x(t)$

# Causal or Non-causal

---

Causal: depends on past only

Causal – real-time, realizable system

Non-causal - can anticipate future

System S is causal iff

$$\begin{aligned} & x_1(t) \equiv x_2(t), \quad \text{for } t \leq t_0 \\ \Rightarrow & y_1(t) \equiv y_2(t), \quad \text{for } t \leq t_0 \end{aligned}$$

# Causal or Non-causal

---

System  $\mathcal{S}$  is causal *iff*

$$\begin{aligned} x_1(t) &\equiv x_2(t), & \text{for } t \leq t_0 \\ \Rightarrow y_1(t) &\equiv y_2(t), & \text{for } t \leq t_0 \end{aligned}$$

$$y(n) = \frac{1}{L} \sum_{k=-M}^M x(k) \quad L = 2M + 1$$

$$n < M, \quad n > M$$

# Stability: Stable or Unstable

---

BIBO: Bounded input -> Bounded output

$$y(n) = \sum_{k=-\infty}^n x(k)$$

# Time invariant or Time variant

---

$$x(t) \rightarrow y(t)$$

$$\Rightarrow x(t - t_0) \rightarrow y(t - t_0)$$

$$y(n) = nx(n - n_0)$$

# Linear or Nonlinear

---

System S is linear iff, it satisfy

1) Superposition

$$\begin{aligned}x_1(t) &\rightarrow y_1(t) \\x_2(t) &\rightarrow y_2(t) \\x_1(t) + x_2(t) &\rightarrow y_1(t) + y_2(t)\end{aligned}$$

2) Homogeneity

$$\alpha x_1(t) \rightarrow \alpha y_1(t)$$

$$\alpha x_1(t) + \beta x_2(t) \rightarrow \alpha y_1(t) + \beta y_2(t)$$

$$y(t) = |x(t)|$$

$$y(t) = mx(t) + c$$

# Linear or Nonlinear

---

# Linear or Nonlinear

---

$$y(t) = \int_{-\infty}^{3t} x(\tau) d\tau$$

$$y(t) = \int_{-\infty}^{3t} x(\tau) d\tau$$

---


Memory/Memoryless?

Causal/Non-causal?

Time Invariant / Time variant?

Stable?

Invertible?




# Linear Time Invariant System: LTI

---

Why Important?

Linearity: Decompose any arbitrary signal in elementary signals

TI: any shifted version

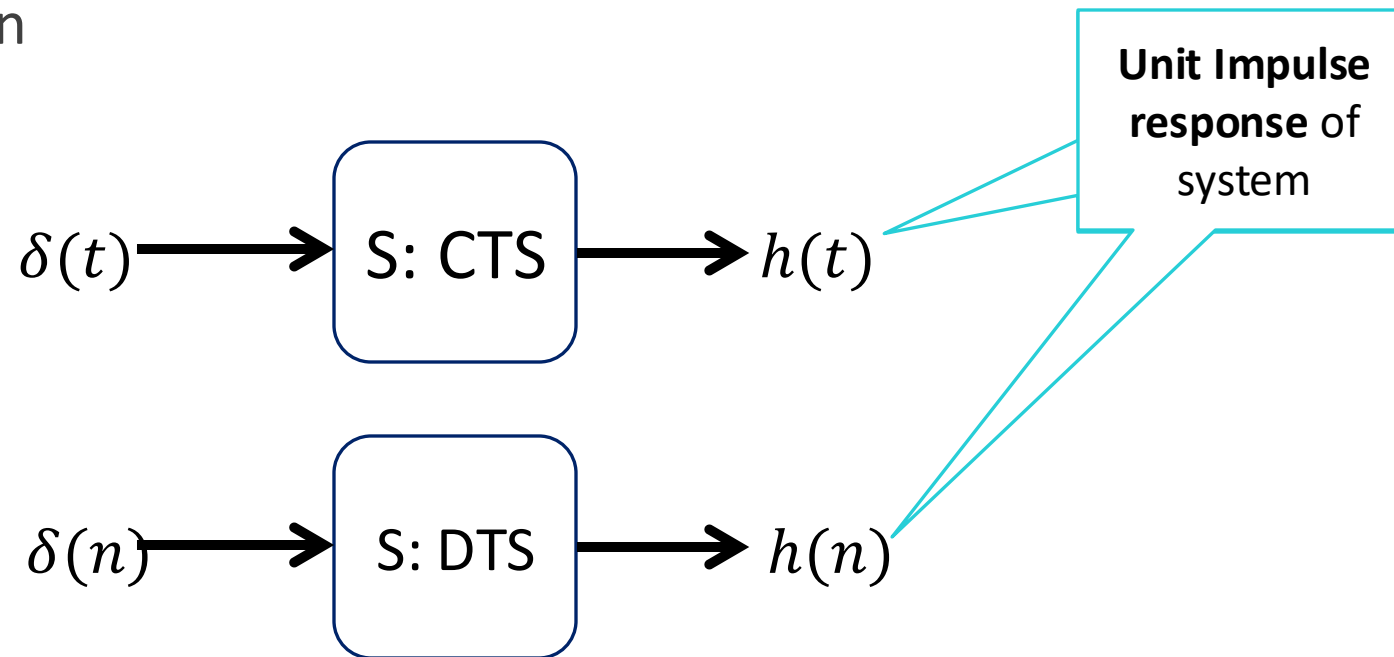

# Linear Time Invariant System: LTI

---

If System is LTI, and **impulse response** is known, we can find the the output of system for any arbitrary input signal  $x(t)$

Example:



# Linear Time Invariant System: LTI

---

If System is LTI, and **impulse response** is known, we can find the the output of system for any arbitrary input signal  $x(t)$

$$\delta(n) \rightarrow h(n)$$

$$\delta(n - k) \rightarrow h(n - k)$$

$$x(k)\delta(n - k) \rightarrow x(k)h(n - k)$$

$$\sum x(k)\delta(n - k) \rightarrow \sum x(k)h(n - k)$$

$$x(n) \rightarrow y(n)$$

$$y(n) = \sum_{k=-\infty}^{\infty} x(k)h(n - k)$$

$$y(n) = x(n) * h(n)$$

Convolution  
Summation



# Convolution

---

$$y(n) = \sum_{k=-\infty}^{\infty} x(k)h(n-k)$$

$$y(n) = \sum_{k=-\infty}^{\infty} x(k-r)h(n)$$

$$y(n) = x(n) * h(n)$$

$$y(n) = h(n) * x(n)$$

$$\begin{aligned} y(n) &= x(n) * h_1(n) * h_2(n) \\ &= h_1(n) * h_2(n) * x(n) \end{aligned}$$

# Convolution: Example

---

# Convolution: Example

---

# Convolution: Example

---

# Exercises: Do at home

---


*Book: Alan V. Oppenheim*

Chapter 1 : System Properties

Chapter 2: Convolution

*Examples*

*Basic Problems*

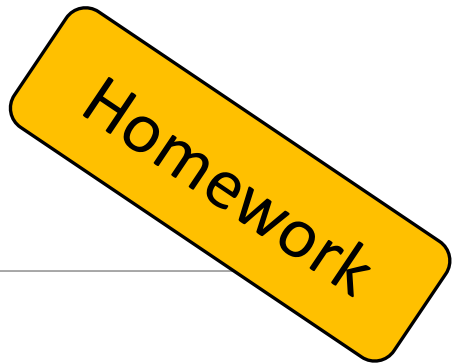



Queen Mary  
University of London